


Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

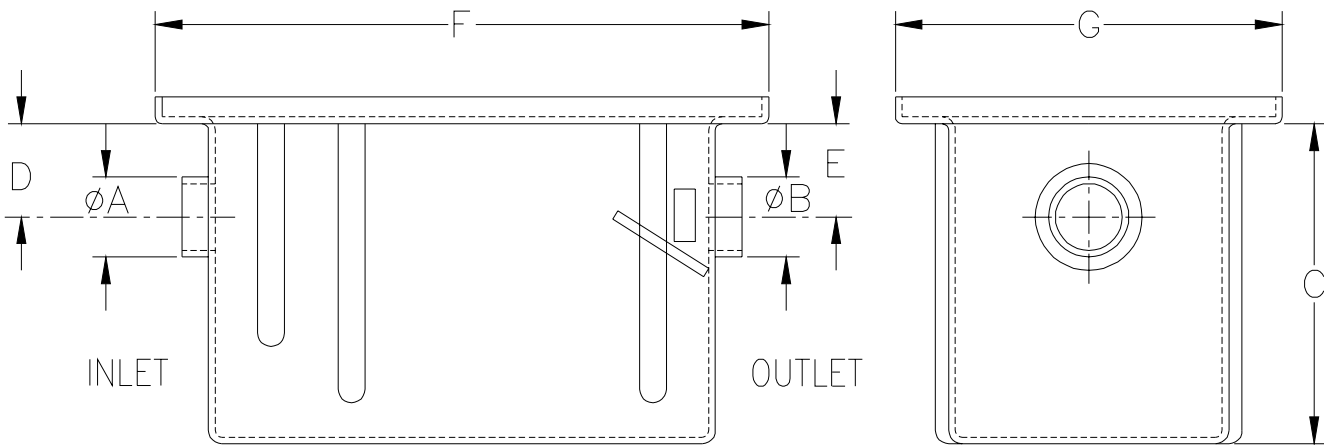

Product	'A' & 'B' Inlet /Outlet	Flow Rate G.P.M. [L/M]	Grease Capacity Lbs. [kg]	Dimensions In Inches				
				C	D	E	F	G
___ GT2702-04	2 [51] Female NPT	4 [15]	8 [4]	9 1/2 [241]	2 [51]	2 [51]	15 [381]	10 [254]
___ GT2702-07	2 [51] Female NPT	7 [26]	14 [6]	11 [279]	3 1/4 [83]	3 1/4 [83]	20 [508]	14 1/2 [368]
___ GT2702-10	2 [51] Female NPT	10 [38]	20 [9]	12 [305]	3 1/2 [89]	3 1/2 [89]	23 [584]	14 1/2 [368]
___ GT2702-15	2 [51] Female NPT	15 [57]	30 [14]	13 [330]	3 1/2 [89]	3 1/2 [89]	23 [584]	19 1/2 [495]
___ GT2702-20	2 [51] Female NPT	20 [76]	40 [18]	14 [356]	3 1/2 [89]	3 1/2 [89]	29 [737]	19 1/2 [495]
___ GT2702-25	3 [76] Female NPT	25 [95]	50 [23]	17 [432]	4 [102]	4 [102]	32 1/2 [826]	19 1/2 [495]
___ GT2702-35	3 [76] Female NPT	35 [132]	70 [32]	18 [457]	4 [102]	4 [102]	32 1/2 [826]	22 [559]
___ GT2702-50	3 [76] Female NPT	50 [189]	100 [45]	18 [457]	4 [102]	4 [102]	37 [940]	25 [635]

GT2702 Grease Interceptor

Recommended for removing and retaining grease from wastewater in kitchen and restaurant areas where food is prepared. Constructed of non-corrosive polyethelene, the interceptor handles continuous temperatures to 212° F. Trap is furnished with NPT connections, removable flow diffusing baffles and external vented flow control device.